


Chime Relay

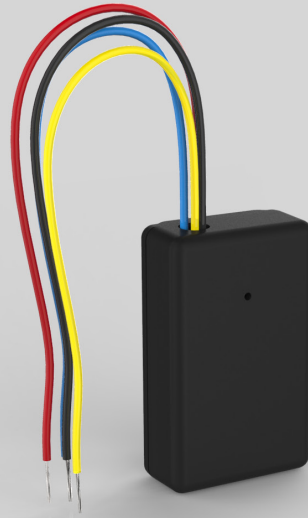



OVERVIEW

The Axxess Wireless Chime Relay is a solid state relay that allows wireless remote control of a powered chime with real chime bars providing the most luxurious sound available.

Installation is easy. Open your wired chime in accordance with the manufacturer's instructions and recommended safety procedures. Then make four simple connections and insert the relay device.

When multiple Axxess Doorbell Buttons are installed at separate entrances the chime relay can differentiate between them and instruct the chime to sound in two tone or single tone mode.

Fully compatible with Control4, and with the industry-leading performance of the Axxess HPZM Radio Module, this device adds additional router range and capability to your ZigBee network.

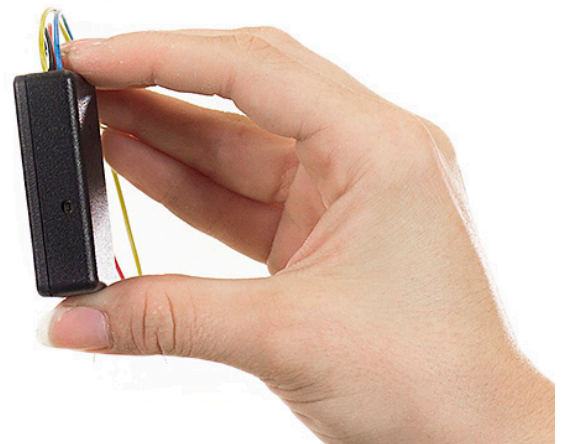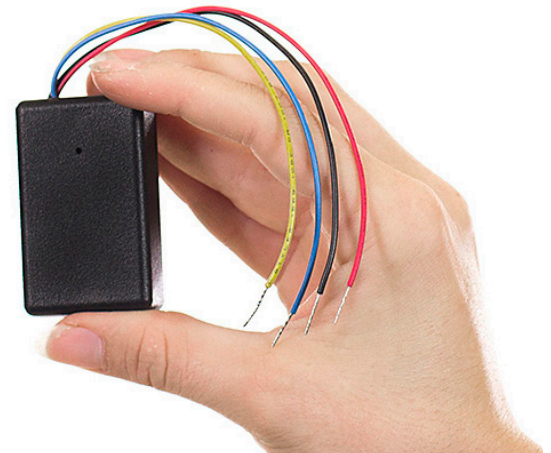

Chime Relay

CR-C4ZB-11

USES

- Wireless remote control of wired chimes
- Multi-purpose relay for low voltage loads

WIRELESS

- Axxess HPZM Radio Module
- ZigBee PRO (802.15.4)
- Long range router capability; successful free range line of sight testing to 1500ft. Range will vary with indoor application.

COMPLIANCE/APPROVALS

FCC Part 15 | CE

RELAY FUNCTION

Solid state relay with two switched lines (AC)

POWER SPECS

Max electrical load ratings on each switched channel: 30VAC | 1.2A

Min/Max voltage input to the device: 15-24VAC typically from chime transformer

COLOR

Black

DIMENSIONS

W 1.25" x H 2.1" x D 0.6" W
3.18cm x H 5.33" x D 1.52cm

MOUNTING

Double-sided adhesive

DRIVERS

Download from
www.axxind.com/dealers/drivers

HOW TO ORDER

In US: blackwiredesigns.com
Outside US: axxind.com/dealers

WHAT'S IN THE BOX

