


Plug-In Chime



OVERVIEW


The Plug-In Chime is a versatile chime that can be triggered wirelessly via ZigBee mesh network.

It has a powerful ZigBee radio that can communicate with our interface partners, such as Control4.

This device plugs into an ordinary 120-240V 50Hz/60Hz outlet.

Currently, users will have to use a plug adapter for receptacles that cannot fit US style blade plugs.


The housing has two fastening options for the two different style of US outlet wall plates.

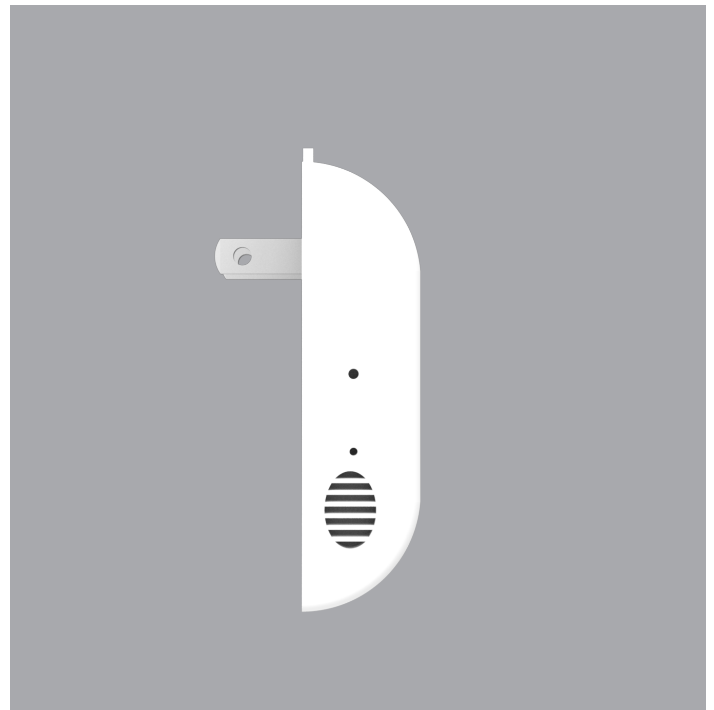



Plug-In Chime

SECURITY MOUNTING OPTIONS


The Axxess Plug-In Chime can be installed by plugging it into any typical US/CAN outlet. It can be secured with a screw.

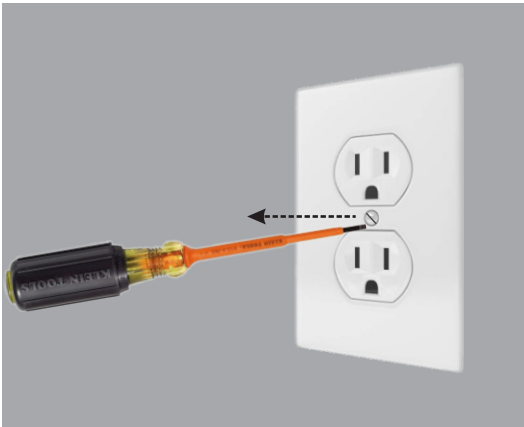

Step #1. Unscrew one mounting plate screw.

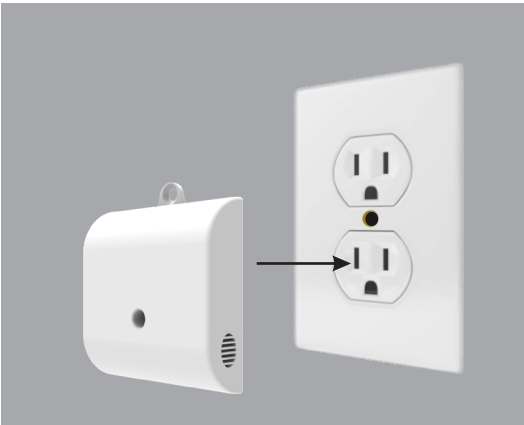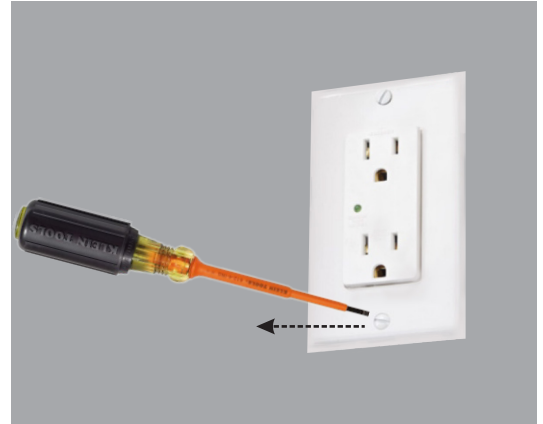

Step #2. Plug into unswitched power outlet.

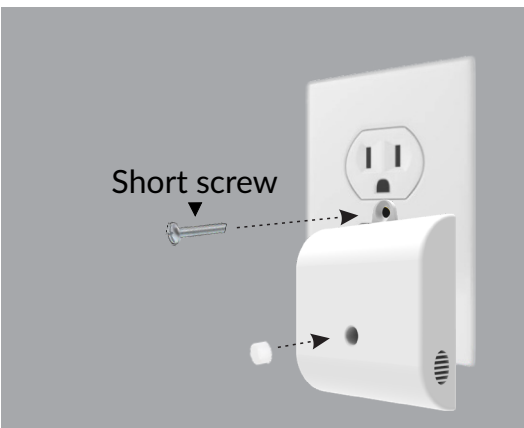

Step #3. Use the applicable screw provided to fasten the Plug-In Chime.

Traditional outlets will use the shorter screw, while the decora outlet uses the longer screw.

Place the plastic cap over the hole on the Plug-In Chime.



Plug-In Chime

WIRELESS

- Axxess HPZM Radio Module
- ZigBee PRO Compatible (802.15.4)
- Control4 Driver Downloadable

POWER SUPPLY

Standard North American 120V outlet or 240V outlets via suitable plug adapters

COMPLIANCE/APPROVALS

FCC Part 15 | IC | CE

AMBIENT CONDITIONS

Indoor use only, 32 to 122°F (0 to 50°C),

RH ≤ 90% non-condensing,

Altitude < 9840 ft. (3000m).

INSTALLATION INSTRUCTIONS FOR ZIGBEE NETWORK

The device has to be mounted within the range of the ZigBee network in which it is to operate.

A network push button is located through the hole about the middle of the left side of the Plug-In Chime when plugged into an outlet.

Use a paper clip to press the button.

To join: 4 taps (6 flashes and long solid flash when successful)

To leave: 13 taps (6 flashes when successful)

To setup: 8 taps (1 flash when successful)

To reset: 15 taps (6 flashes OR 1 long solid flash when successful)

Setup mode ends after 8 minutes.

DIMENSIONS

78mm x 70 mm x 18 mm (w/o plug)

78mm x 70 mm x 34 mm (w/ plug)

DRIVERS

Download from www.axxind.com/dealers/drivers

COLOR

Black | White

HOW TO ORDER

axxind.com/dealers

