


Relay & Contact Sensor-6

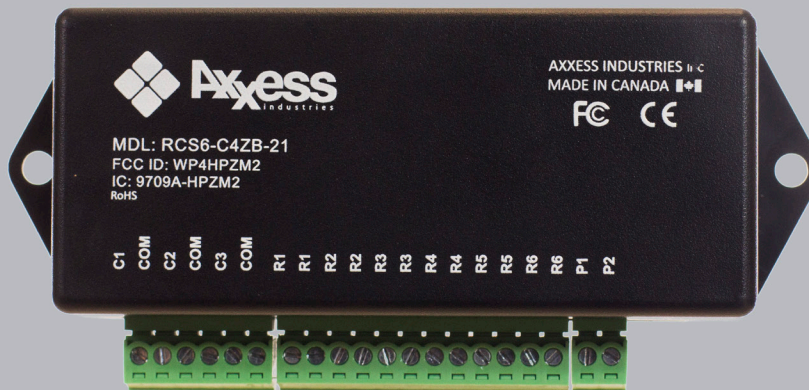

OVERVIEW

The Axxess RCS6 is a flexible tool to build a Control4 system more effectively. It combines the capabilities of a repeater and router with 3 contact inputs and 6 relay outputs.

The repeater function allows more devices to be joined to the network, and with the industry-leading performance of the Axxess HPZM Radio Module, this device adds additional router range and capability to your ZigBee network.



Relay & Contact Sensor-6

RCS6-C4ZB-21

WIRELESS

- Axxess HPZM Radio Module
- ZigBee PRO (802.15.4)
- Long range router capability; successful free range line of sight testing to 1500ft. Range will vary with indoor application.

COMPLIANCE/APPROVALS

FCC Part 15 | IC | CE

REPEATER FUNCTION

Join more devices and/or extend the range of your ZigBee network

- new high power radio module
- up to 16 child nodes

POWER SUPPLY

- A 3.6V DC adapter with either a North American, European, Australia/China or UK plug.
- Device can also be powered via auxiliary power terminal block connection that accepts a 6.5-24V AC or DC.

CONTACT SENSOR FUNCTION

3 contact sensor inputs

DIMENSIONS

W 2 5/32" x L 4 27/32" x H 1 7/32"
W 5.6cm x L 12.2cm x H 3.1cm

RELAY FUNCTION

6 relay outputs
DC load max: 1A | 60VDC
AC load max: 1A | 40VAC

COLORS

Black

POPULAR APPLICATIONS

Drape and blind control
Garage doors

WHAT'S IN THE BOX

